




## Constant climate chamber HPP750

Our constant climate chamber is tailored to environmental simulation, material testing and stability testing in accordance with the ICH guidelines.



On this page, you can find all the essential technical data on the Memmert stability chamber HPP. Our customer relations team will be pleased to help if you want further information. If you should require a customised special solution, please contact our technical specialists at [myAtmoSAFE@memmert.com](mailto:myAtmoSAFE@memmert.com).

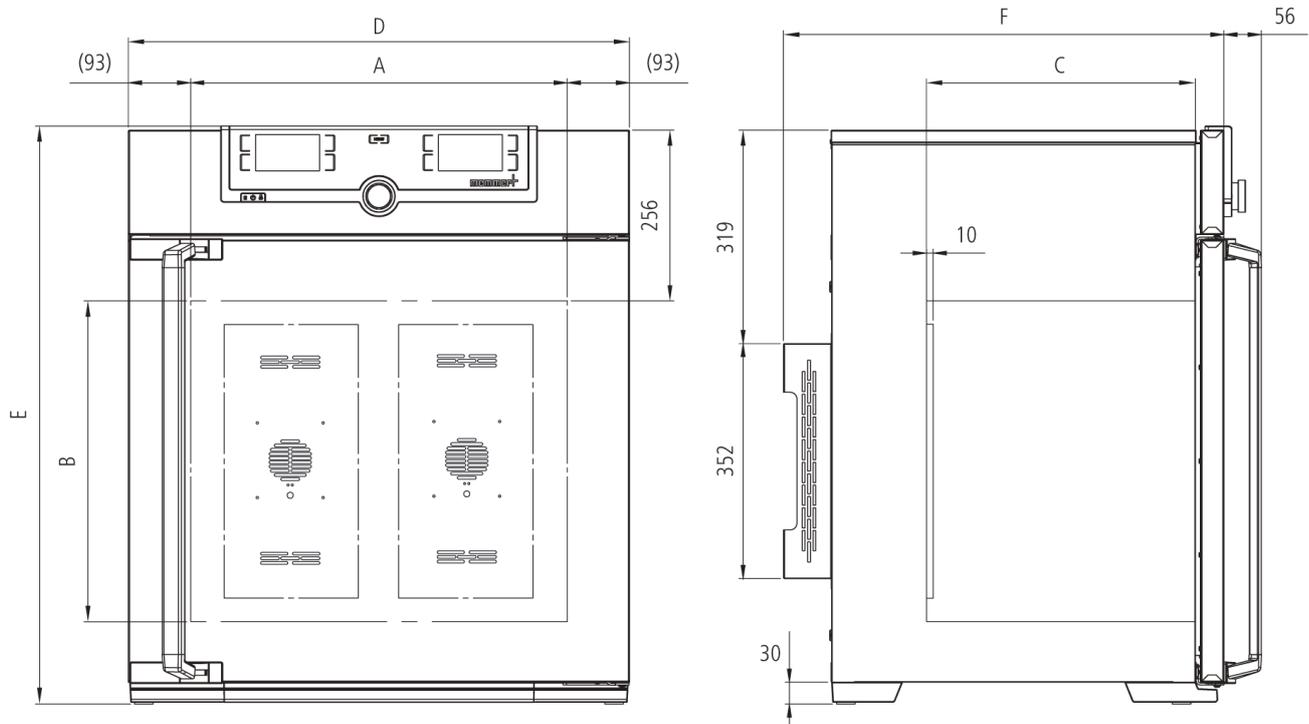

## Control of standard components

<b>Control</b> <b>COCKPIT</b>	adaptive multifunctional digital PID-microprocessor controller with 2 high-definition TFT-colour displays
<b>Temperature</b>	2 Pt100 sensors Class A in 4-wire-circuit, mutually monitoring and taking over the performance at the same temperature value
<b>Timer</b>	Digital backwards counter with target time setting, adjustable from 1 minute to 99 days
<b>Humidity</b>	humidity supply with distilled water from external tank by self-priming pump
<b>Humidity</b>	active humidifying and de-humidifying adjustable from 10 - 90 % rh with digital display of relative humidity - resolution of display 0.1 %, setting accuracy 0.5 %
<b>Humidity</b>	humidity supply with distilled water from external tank by self-priming pump
<b>Humidity</b>	humidification by hot steam generator
<b>Humidity</b>	dehumidification by cold trap using the Peltier technology

## Temperature

	from 0°C to +70°C
<b>resolution of display for setpoint and actual temperature values</b>	0.1°C

## Control technology

<b>Function</b> <b>HeatBALANCE</b>	adapting the distribution of the heating performance of the upper and lower heating circuit from -50 % to +50 %
<b>adjustable parameters</b>	temperature (Celsius or Fahrenheit), relative humidity, programme time, time zones, summertime/wintertime
<b>Function</b> <b>SetpointWAIT</b>	the process time does not start until the set temperature is reached
<b>Language setting</b>	German/English/Spanish/French
<b>Calibration</b>	three freely selectable temperature values, 2-point calibration for humidity: 20 and 90 % rh

## Ventilation

forced ventilation by Peltier fan

## Communication

<b>Programming</b>	AtmoCONTROL software on a USB stick for programming, managing and transferring programmes via Ethernet interface or USB port
<b>Documentation</b>	programme stored in case of power failure

## Safety

<b>Autodiagnostic system</b>	integral fault diagnostics for temperature and humidity control
<b>Alarm</b>	visual and acoustic
<b>Temperature control</b>	over- and undertemperature monitor TWW, protection class 3.3 or adjustable temperature limiter TWB, protection class 2, selectable on display
<b>AutoSAFETY</b>	additionally integrated over- and undertemperature protection "ASF", automatically following the setpoint value at a preset tolerance range, alarm in case of over- or undertemperature, heating function is switched off in case of overtemperature, cooling function in case of undertemperature

## Heating concept

**Heating and cooling performance distribution by individual control of the Peltier elements in the upper and lower row**  
**energy-saving Peltier heating-/cooling system integrated in the rear (heat pump principle)**

## Standard equipment

<b>Door</b>	fully insulated stainless steel doors with 2-point locking (compression door lock)
<b>Door</b>	inner glass doors
<b>Installation</b>	on lockable castors
<b>Housing</b>	rear zinc-plated steel
<b>Internals</b>	2 stainless steel grids

## Stainless steel interior

<b>Dimensions W x H x D in mm</b>	$w_{(A)} \times h_{(B)} \times d_{(C)}$ : 1040 x 1200 x 600 mm
<b>Volume</b>	749 l
<b>Max. loading of chamber:</b>	200 kg

## Textured stainless steel casing

$w_{(D)} \times h_{(E)} \times d_{(F)}$ : 1224 x 1726 x 874 mm

## Electrical data

<b>Voltage</b>	115 V, 50/60 Hz
<b>Electrical load</b>	approx. 1200 W
<b>Voltage</b>	230 V, 50/60 Hz
<b>Electrical load</b>	approx. 1200 W

## Packing/shipping data

the appliances must be transported upright

<b>Customs tariff number</b>	8419 8998
<b>Country of origin</b>	Federal Republic of Germany
<b>WEEE-Reg.-No.</b>	DE 66812464
<b>Dimensions approx incl. carton</b>	B x H x T: 1330 x 1910 x 1050 mm
<b>Net weight</b>	approx. 208 kg
<b>Gross weight carton</b>	approx. 279 kg

Standard units are safety-approved and bear the test marks

